



150W

Smart LED Lighting

LED Retrofit Kits



Suitable for Outdoor Pole/Arm-Mounted Area and Roadway Luminaires.

Features & Benefits:

- Built-in Surge Suppressors & Transient Protection
- High Power Factor • Self Ballasted
- Rated Life 50,000 Hours (*)
- UL Listed LED Driver
- Bright • High CRI
- Low THD



| Model | Product | Size | Power | Flux | Equivalent |
|--------------|------------------------------|--|-------|--------------|----------------|
| LRK-150W-57K | 150W 5,700K LED Retrofit Kit | LED Engine (L) 10 ³ / ₈ " (W) 6 ¹ / ₄ " (D) 2 ³ / ₈ " | 150W | 15,000 Lumen | 600W MH or HPS |

• Rated Voltage: 120-277Vac ~50/60Hz • P.F. > 0.9 • ~100lm/W • CRI ≈ 80 •
 •(*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. • Beam Angle 90° • Pigtail Wire/Cable to Mains •





150W



Smart LED Lighting

LED Retrofit Kits

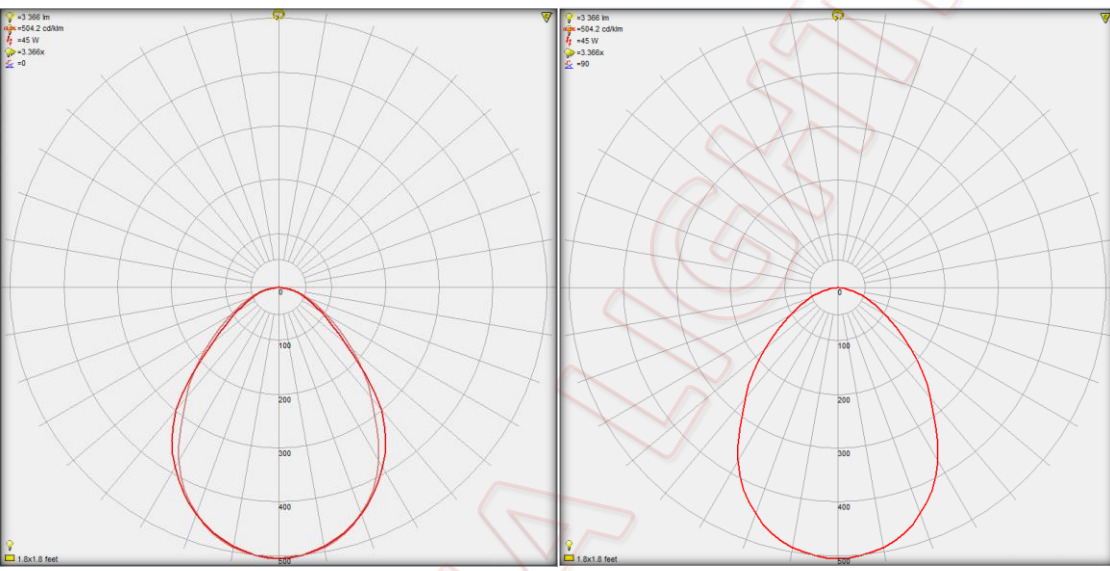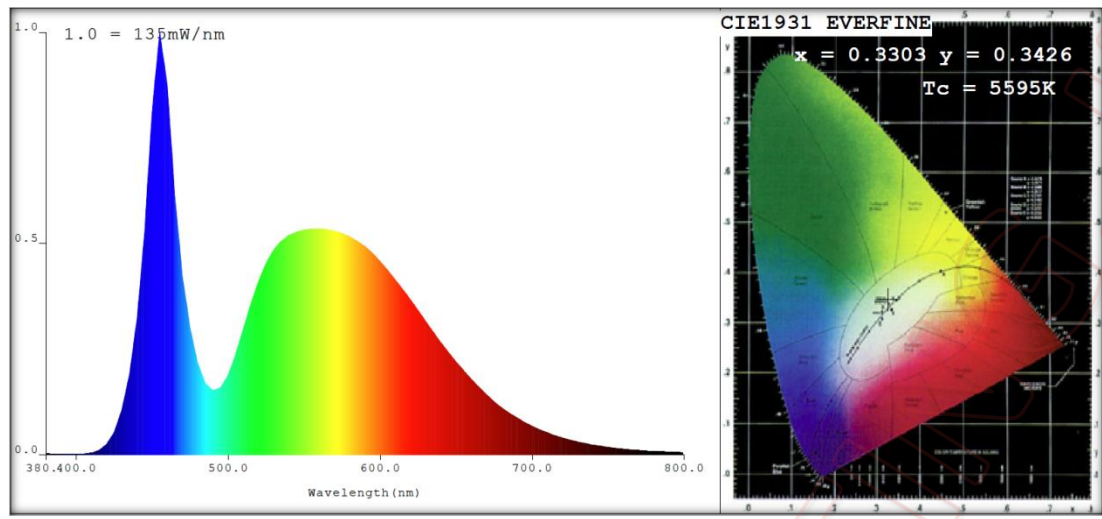

Light & Bright

**Size / Dimensions
LED Engine**
(L) 10³/₈" (W) 6¹/₄"
(D) 2³/₈"

| Model | Product | Power | Equivalent |
|------------------------|------------------------------|------------|---|
| LRK-150W-57K | 150W 5,700K LED Retrofit Kit | 150W | 600W MH &/or HPS Lamp |
| Input Voltage | Power/Power Factor | Efficacy | Flux |
| 120-277Vac ~50/60Hz | 155W Max. P.F. > 0.9 | ~100 lm/W | 15,000 ~ 15,500 Lumen |
| Color Rendering | Color Temperature | Beam Angle | Life |
| CRI ÷ 75~80 | 5700K CCT ±10% | 90° | 50,000 Hours (L ₇₀ B ₅₀) T _[A] 45°C Max. |