



FEATURES & SPECIFICATIONS

INTENDED USE — Specification-grade emergency ballast operates one or two lamps (4' or shorter) or one 8' lamp. Factory or field installed within fluorescent fixture ballast channel. Upon interruption of normal power battery pack automatically strikes and operates lamps at reduced light output, providing glare-free illumination for 90 minutes.

CONSTRUCTION — Durable thermoplastic/metal housing resists impact, scratches, and corrosion. UL-94V-0 flame rating.

Reduced-profile footprint fits in the tightest applications.

Polarized quick-connect pilot light/test switch assembly simplifies installation.

Pilot light and test switch provide visual and manual means of monitoring system operation.

U.S. Patent No. 6,522,147; 5,814,971; 6,577,136; D550,154.

PERFORMANCE — Lamp selector switch optimizes single or dual lamp performance.

Compatible with instant start, rapid start, and slimline ballasts for 90 minutes emergency operation. See compatibility chart on page 2.

ELECTRICAL — Multi-voltage input capability (120V-277V; 50-60 Hz).

Constant current-type charger. Input circuit provides high efficiency and reliable operation.

High-efficiency push-pull inverter is the most effective method of converting DC power to AC power. It provides maximum light output, battery life and reliability.

BATTERY — Sealed, maintenance-free, high-temperature nickel-cadmium battery. Automatic battery recharge after 90-minute discharge. Fully charged after 24 hours.

INSTALLATION — Patented Quick-Disconnect connector system allows for quick and easy replacements at end of life without rewiring.

Mounts concealed within fixture wireway for clean appearance and protection against vandalism; or mounts on outside of fixture housing if internal space is limited. Two 1/2" holes in fixture channel permit mounting of test switch/pilot light behind fixture lens.

External mounting requires a remote mounting enclosure (ELA PSRME).

Compact size (13-5/16" L x 2-3/16" W x 1-3/16" H) fits in a variety of fluorescent fixtures: troffers, volumetric recessed, industrials, commercials and strips.

Unit wires two ways: on night light circuit (permanently energized) or on switchable circuit (unswitched circuit to battery charger and switched circuit to the fixture ballast). Unit will strike normally off lamp.

Unit mounting centers are identical to a standard ballast.

LISTINGS — UL listed. 0° - 50°C (32° - 122°F). Meets UL 924, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards.

Standard unit is UL approved for installation in sealed and gasketed fixtures.

See [PS1400DW](#) specification sheet for product UL approved for use in wet and damp location fixtures.

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx


Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Catalog Number
Notes
Type

1400 Lumen Reduced-Profile

PS1400QD MVOLT

Emergency Ballast

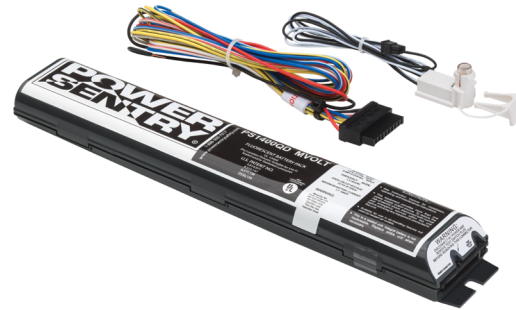

ORDERING INFORMATION For shortest lead times, configure product using bolded options.

Example: PS1400QD MVOLT PSBCEB2

PS1400QD MVOLT	
Series	Options
PS1400QD MVOLT Emergency fluorescent battery pack	PSBCEB2 CEC Title 20 module ¹ SD Self-diagnostics ^{2,3,4}

Accessories: Order as separate catalog number.	
ELA TSPLP	Remote or replacement test switch pilot light; mounts up to 25' away from fixture ⁵
ELA TSPLPSD	Remote or replacement test switch pilot light for self-diagnostics; mounts up to 25' away from fixture ⁵
ELA PSMKSD	External mounting kit for self-diagnostics module ⁵
ELA PSRME	External mounting box enclosure PSQ500QD MVOLT, PS600QD and PS1400QD MVOLT ⁵
ELA PSPRSB	Field-installable interface for enhanced compatibility with lamp EOL protection ballasts ^{4,5}
PSSD2	Field-installable self-diagnostics module ²

Notes

- 1 Not available with SD option. Module required for California.
- 2 Self-diagnostics (PSSD2) module ships separately. See [PSSD2](#) spec sheet for more details.
- 3 Compatible with lamp EOL protection ballasts.
- 4 ELA PSPRSB not required with SD option.
- 5 See [ELA-RTS-TSPLP-PSTS-PSPRSB](#) and [ELA-PSMK-PSMKSD-PSDMT-PSRME](#) spec sheets for more details.

PS1400QD MVOLT Emergency Ballast

SPECIFICATIONS

BATTERY				
Sealed Nickel-Cadmium				
Voltage	Typical Shelf life ¹	Typical life ¹	Maintenance ²	Temperature range ³
9.4V	3 years	7-9 years	none	32-100° F

Notes

- At 77°F.
- All life safety equipment, including emergency lighting for path of egress must be tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required testing could jeopardize the safety of occupants and will void all warranties.
- Ambient temperature range where unit will provide capacity for 90 minutes. Higher and lower temperatures affect life and capacity. Consult factory for detailed information.

ELECTRICAL

Volts	Maximum AC input	
	Amps	Watts
120	.27	3.3
277	.29	3.2

LAMP COMPATIBILITY

Lamp Type	Wattage	PS1400QD MVOLT
Lumens		800-1500
24"-48" T5	14-28	1
24"-48" T5HO	25-54	1
U-Lamp T8	32	1.2
24"-48" T8	17-32	1.2
48"-60" T8	32-40	1.2
48" T8HO	44	1
96" T8HO	86	1
PL Twin-Tube (4-Pin)	13	1
PL Quad-Tube (4-Pin)	13-26	1.2
Triple-Tube (4-Pin)	18-32	1.2
Triple-Tube (4-Pin)	42	1
Long Compact (4-Pin)	18-40	1

Notes


- * Based on the lumen output of the lamp; provides full light output.
- One-lamp emergency operation for 1, 2, 3 or 4-lamp ballasts.
 - Two-lamp emergency operation for 2, 2 or 4-lamp ballasts.
 - One-lamp, 2 hour emergency operation for 2, 3 or 4-lamp ballasts.
 - 2 LP option required for 2-lamp emergency operation in fixtures with two or more lamps.

RECOMMENDED SPACING

One Footcandle Average Fixture-to-Fixture Spacing Guidelines PS1400QD MVOLT

	Application	T8 Lensed Troffer	T8 Parabolic	T8 Direct/Indirect
2x4	Open Office	47'	45'	47'
	Corridor	57'	53'	59'
2x2	Open Office	47'	38'	47'
	Corridor	54'	49'	53'

OPEN OFFICE SPACING




Meets Life Safety Code standard minimum illuminance of 0.1FC and average illuminance of 1.0 FC. Assumes 3 T8 lamps in each fixture, 6-foot wide path of egress, ceiling height 9' and reflectances of 80/50/20.

Fluorescent Battery Pack: PS1400QD MVOLT
Fluorescent Fixture: 2x4 Parabolic
Lamp Type: F32T8

MOUNTING

All dimensions are inches (millimeters).




New reduced-profile design fits in the tightest of applications

Cross section end view:
Length: 13-5/16 inches
Shipping weight: 2.0 lbs (0.68 kg).


KEY FEATURES

Quick-Disconnect wiring system



KEY OPTIONS

Self-Diagnostics Module



INITIAL LUMEN OUTPUT TABLE

Type	Description	1 Lamp (lm)	2 Lamps (lm)
T5/T5HO	FP14/T5	800	NC
	FP24T5/HO	700	NC
	FP28T5	1450	NC
	FP54T5/HO (49W)	1100	NC
	FP54T5/HO (54W)	900	NC
T8	F17T8	850	950
	F32T8	1450	1450
	FB31T8	1400	1400
CFL	CF40	950	NC
	FT40DL28W	1050	NC

NC = Not compatible

Initial lumen output measured at 25°C ambient temperature.



PS1400QD MVOLT