

### Type IC & Air-Tight



#### DESCRIPTION

4" Round Recessed LED With Integral Driver In Connection Box  
Single Color or 5 CCT


#### FEATURES & BENEFITS

- 1/2" Thick - Install Directly Under Ceiling Joists
- Type IC Rated - No Housing Required
- Driver Inside Connection Box - No Junction Box Needed
- 5 CCT Switchable Option - User Selectable Light Colors

**DIMENSIONS** ID 4" OD 5" Cut Out 4 1/8" to 4 1/4"

Fixture Thickness: 1/2"

120V Triac Dimmable Driver Included

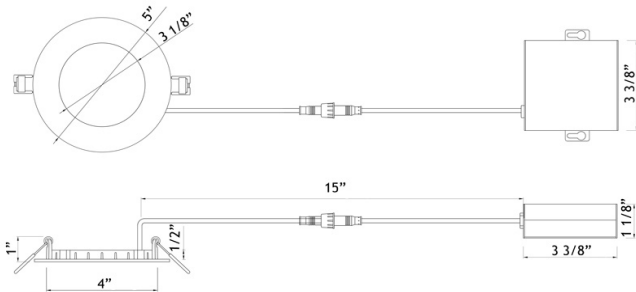

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Renovations & New Construction
Energy Used	9 W
Color Temperature (K)	3000   4000   5 CCT
Light Output (lm)	600   620   600
Halogen Equivalent	60 W
Beam Angle	120°
CRI	80
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4° F (-20° C) to +104° F (+40° C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
Warranty	3 Year

#### 5 CCT Option



#### ORDERING GUIDE Example LED-S9W-3K-WH

LED-S9W	CCT	Trim
	- xK	- WH

3000K	3K	- WH
4000K	4K	- WH
5 CCT	5CCT	- WH

Stock trim - White

Other Trim Colors Available By Custom Order

#### ACCESSORIES

Sold Separately



13" Mounting Plate Flat cat # MP4-2



13" Mounting Plate Flanged cat # MP4



26" Flat Rough-In Plates - cat # RIP412



Flanged Plate with Hanger Bars - cat # FRP4



Jumper Cable 10 ft cat # JC10. For Single Color Models Only. Maximum Extension 40 feet



Goof Ring White OD 5 3/4" cat # GR4