

PULLING ROPE

- Double braided for added strength and low stretch
- Rot and mildew resistant
- Factory spliced eyes at both ends
- Low stretch

Model	Description	Specs
Tensile Strength: 16,300 lb.		
P58-100	5/8" x 100' Standard Pulling Rope	5/8" x 100'L
P58-300	5/8" x 300' Standard Pulling Rope	5/8" x 300'L
P58-600	5/8" x 600' Standard Pulling Rope	5/8" x 600'L
Tensile Strength: 26,000 lb.		
P34-100	3/4" x 100'L Standard Pulling Rope	3/4" x 100'L
P34-600	3/4" x 600'L Standard Pulling Rope	3/4" x 600'L
Tensile Strength: 32,000 lb.		
P78-100	7/8" x 100'L Standard Pulling Rope	7/8" x 100'L
P78-600	7/8" x 600'L Standard Pulling Rope	7/8" x 600'L
P78-1200	7/8" x 1200'L Standard Pulling Rope	7/8" x 1200'L
P78-3000	7/8" x 3000'L Standard Pulling Rope	7/8" x 3000'L
PP14-1200	1/4" x 1200'L Yellow Polypropylene Rope	1/4" x 1200'L



REAL SPOOL™

- Holds up to 300 lb.
- Will not splinter like a wood spool
- Lighter than a wooden spool
- Will not fray or damage the rope like wood
- Made out of heavy US steel, making it more durable than the average spool
- Works great for iTOOLco's Pull-Slick

Model	Description	Specifications
RS01	Real Spool	30"L x 25"W x 24"H, 30 lb.



No more wasted time rolling up a rope

Conveniently store and move Real Jacks on the Real Tender.

REAL TENDER™

Faster

- Easy to set up and transport
- Light and maneuverable
- Easy one person operation
- Saves time
- Crank handle for faster re-spooling

Safer

- Prevents injuries from lifting and handling rope
- No more lifting heavy wire spools

Smarter


- Axle-less technology
- Multi-directional
- Horizontal or vertical use
- Rolls over rough terrain on job site
- Cleaner handling of expensive rope (high & dry)

Capacity

- Spool widths: 12"-35"
- Spool diameters: 12"-32"
- 300 lb. weight limit

NOTE: Patented

Model	Description	Specifications
RT01	Real Tender	49"L x 23"W, 38 lb.

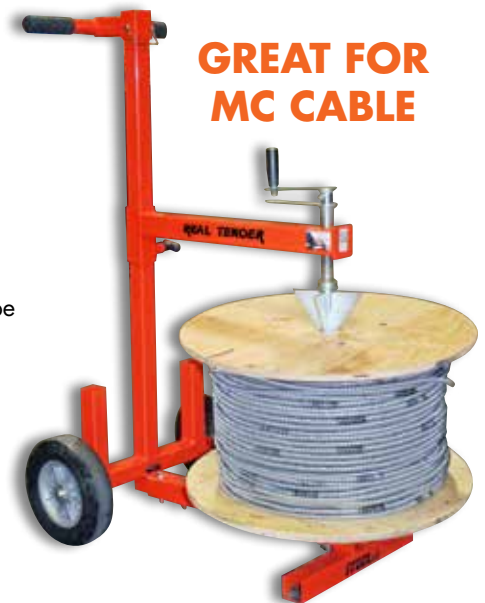

GREAT FOR MC CABLE



MADE IN THE
USA
WITH GLOBAL COMPONENTS
6
YEAR
LIMITED WARRANTY